


ROLLER SHADES

OTTO™ WIRED 6 MOTORIZED SHADE SPECIFICATIONS

FEATURES

- Recommended max shade size 120"x120"
- Leveling Control
- Simple limit setting and adjustment
- Favorite position
- 2-way RF communication
- Bi-Directional protocol for simple programming
- "Slim Head" design minimizes light gap
- Low Noise Operation

DIMENSIONS

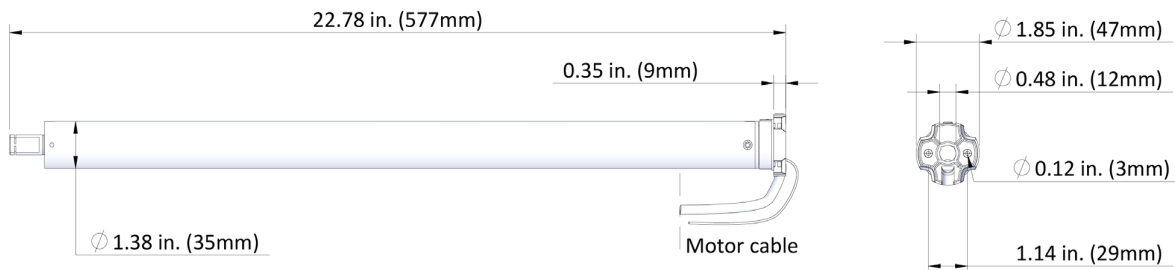


SPECIFICATIONS

Voltage	110-120 A/C	IP Rating	IP44
Torque	6.0Nm	Limit Switch Type	Electronic
Max Run Time	4 Min	Amps	0.85A
Speed	33 RPM	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	III
RF Modulation	FSK	Sound Level	~44DB

ROLLER SHADES

OTTO™ WIRED 6 MOTORIZED SHADE SPECIFICATIONS

APPLICATIONS



ROLLER SHADE

COMPATIBLE SYSTEMS

- Skyline

COMPATIBLE TUBES

- 2"
- 3"

ACCESSORIES

POWER SOLUTIONS	Descr: AC Grounding 3 Conductor Male Plug	CROWN AND DRIVE	Descr: OTTO wired 6 Crown & Drive Set
REMOTES & SWITCHES	Descr: OTTO 1 Channel Remote	BRACKET ADAPTERS	Descr: 35 mm Slim Head ARC Motor Star Head Adapter with screws
	Descr: OTTO 15 Channel Remote		
	Descr: OTTO White 1 Channel Decorator Wall Switch (Cut In)		
	Descr: OTTO White 2 Channel Decorator Wall Switch (Cut in)		
	Descr: OTTO White 15 Channel Decorator Wall Switch (Cut in)		
AUTOMATION DEVICES	Descr: OTTO White 5 Channel Decorator Surface Mount Switch		
	Descr: OTTO Sun Sensor		
	Descr: OTTO 1 Channel Dry Contact Input Module - 433 RF		
	Descr: OTTO Wifi Bridge 2 Wifi to 433 2 way RF Bridge Kit		